

ESD-TDR-64-628

W-6324

A METHOD TO COMPUTE THE CHARACTERISTICS  
OF LUMPED ELECTROMAGNETIC DELAY LINES

TECHNICAL DOCUMENTARY REPORT NO. ESD-TDR-64-628


**ESD RECORD COPY** DECEMBER 1965RETURN TO  
SCIENTIFIC & TECHNICAL INFORMATION DIVISION  
(ESTI), BUILDING 1211**ESD ACCESSION LIST**ESTI Call No. AL 48506Copy No. 1 of 1 cys.

H. B. Opladen

Prepared for

DIRECTORATE OF COMPUTERS  
ELECTRONIC SYSTEMS DIVISION  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE

L. G. Hanscom Field, Bedford, Massachusetts



Project 708

Prepared by

THE MITRE CORPORATION  
Bedford, Massachusetts  
Contract AF 19(628)-2390

ESRC

AD0625733

Copies available at Office of Technical Services,  
Department of Commerce.

Qualified requesters may obtain copies from DDC.  
Orders will be expedited if placed through the librarian  
or other person designated to request documents  
from DDC.

When US Government drawings, specifications, or  
other data are used for any purpose other than a  
definitely related government procurement operation,  
the government thereby incurs no responsibility  
nor any obligation whatsoever; and the fact that the  
government may have formulated, furnished, or in  
any way supplied the said drawings, specifications,  
or other data is not to be regarded by implication  
or otherwise, as in any manner licensing the holder  
or any other person or corporation, or conveying  
any rights or permission to manufacture, use, or sell  
any patented invention that may in any way be related  
thereto.

Do not return this copy. Retain or destroy.

A METHOD TO COMPUTE THE CHARACTERISTICS  
OF LUMPED ELECTROMAGNETIC DELAY LINES

TECHNICAL DOCUMENTARY REPORT NO. ESD-TDR-64-628


DECEMBER 1965

H. B. Opladen

Prepared for

DIRECTORATE OF COMPUTERS  
ELECTRONIC SYSTEMS DIVISION  
AIR FORCE SYSTEMS COMMAND  
UNITED STATES AIR FORCE

L. G. Hanscom Field, Bedford, Massachusetts



Project 708

Prepared by

THE MITRE CORPORATION  
Bedford, Massachusetts  
Contract AF 19(628)-2390



## ABSTRACT

This document presents a method of computing the coefficients of the transfer function of iterated or noniterated lumped electromagnetic delay lines. The method shows that the coefficients can be found by using Pascal's triangle for iterated delay lines.

## REVIEW AND APPROVAL

This technical documentary report has been reviewed and is approved.



SEYMOUR JEFFERY  
Major, USAF  
Chief, Computer Division  
Directorate of Computers



## SECTION I

### INTRODUCTION

A method is developed which enables one to determine the frequency response and phase shift of nonhomogenous lumped delay lines. From this general relationship between input and output signals, the special case of a homogenous lumped delay line can be treated.

## SECTION II

### NONHOMOGENOUS LUMPED DELAY LINES

Every section of the nonhomogenous delay line is considered as a half  $\pi$ -section. The sequence of these elementary sections is shown in Fig. 1. A series element impedance is expressed by the symbol  $a$ , and a shunt element impedance by the symbol  $b$ . Every one of these impedances has an associated frequency operator containing resistance, capacitance, or inductance. For example, an inductance with loss is written in the operator form

$$a_i(P) = R_i + PL_i \quad ,$$

or a lossless capacitor in the formulation

$$b_i(P) = \frac{1}{PC_i} \quad .$$

In general, each elemental series or shunt impedance can be expressed by


$$a_i = a_i(P)$$

or

$$b_i = b_i(P) \quad .$$

In the following analysis, the operator variable  $(P)$  is eliminated for simplification.



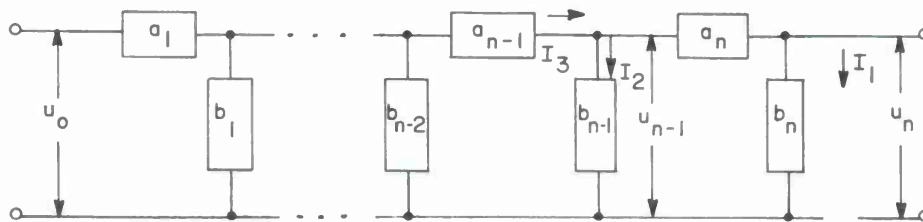

IA-14,796

The frequency response is expressed by the ratio between input and output voltages

$$F(P) = \frac{u_n}{u_o} \quad (1)$$

The input  $u_n$  is calculated from the voltage  $u_{n-1}$  across the impedance  $b_{n-1}$  :

$$u_n = I_1 b_n \quad ,$$

$$u_{n-1} = I_1 (a_n + b_n) \quad ,$$

$$u_{n-1} = I_1 c_n \quad ,$$

or

$$u_n = \frac{b_n}{c_n} u_{n-1} , \quad (2)$$

and

$$u_{n-1} = \frac{b_{n-1} + c_n}{b_{n-1} + c_n} I_3 = \frac{b_{n-1} + c_n}{b_{n-1} + c_n} \frac{u_{n-2}}{c_{n-1}} . \quad (3)$$

By substitution of Eq. (3) into Eq. (2), it follows that

$$u_n = \frac{b_n}{c_n} \frac{b_{n-1} + c_n}{b_{n-1} + c_n} \frac{u_{n-2}}{c_{n-1}} . \quad (4)$$

Thus, one can write

$$\frac{u_n}{u_{n-2}} = \frac{b_n}{c_n} \frac{b_{n-1} + c_n}{b_{n-1} + c_n} \frac{1}{c_{n-1}} . \quad (5)$$

Therefore, the ratio between input and output voltage of the whole transmission line can be written as

$$F(P) = \frac{u_n}{u_o} = \frac{b_n}{c_n} \frac{b_{n-1} + c_n}{b_{n-1} + c_n} \frac{1}{c_{n-1}} \frac{b_{n-2} + c_{n-1}}{b_{n-2} + c_{n-1}} \frac{1}{c_{n-2}} \dots \frac{1}{c_2} \frac{b_1 + c_2}{b_1 + c_2} \frac{1}{c_1} , \quad (6)$$

or

$$F(P) = \frac{\prod_{i=1}^{i=n} b_i}{c_1 \prod_{i=1}^{i=n-1} (b_i + c_{i+1})} , \quad (7)$$

as can be seen from Fig. 1.

$$c_{n-1} = a_{n-1} + \frac{b_{n-1} c_n}{b_{n-1} + c_n} \quad (8)$$

or, in general,

$$c_i = a_i + \frac{b_i c_{i+1}}{b_i + c_{i+1}} . \quad (9)$$

In order to eliminate the sum-product in the denominator of Eq. (7), the second factor in the denominator of Eq. (6) is rearranged as

$$b_{n-2} + c_{n-1} = b_{n-2} + a_{n-1} + \frac{b_{n-1} c_n}{b_{n-1} + c_n} , \quad (10)$$

and the first factor in the denominator of Eq. (6) is defined as

$$N_{n-1} = b_{n-1} + c_n . \quad (11)$$

Substituting into Eq. (10), one obtains

$$b_{n-2} + c_{n-1} = b_{n-2} + a_{n-1} + \frac{b_{n-1} c_n}{N_{n-1}} , \quad (12)$$

or

$$b_{n-2} + c_{n-1} = b_{n-2} + \frac{a_{n-1} N_{n-1} + b_{n-1} c_n}{N_{n-1}} . \quad (13)$$

Again, defining

$$Z_{n-2} = a_{n-1} N_{n-1} + b_{n-1} c_n , \quad (14)$$

Eq. (13) can be rewritten as

$$b_{n-2} + c_{n-1} = b_{n-2} + \frac{Z_{n-2}}{N_{n-1}} . \quad (15)$$

From Eq. (15) it follows that

$$c_{n-1} = \frac{Z_{n-2}}{N_{n-1}} , \quad (16a)$$

and also

$$c_n = \frac{Z_{n-1}}{N_n} . \quad (16b)$$

If it is assumed that

$$c_n = Z_{n-1} , \quad (17)$$

it follows that  $N_n = 1$ . Substituting the value of  $c_n$  in Eq. 14, one obtains

$$Z_{n-2} = a_{n-1} N_{n-1} + b_{n-1} Z_{n-1} , \quad (18)$$

or, in general,

$$Z_i = a_{i+1} N_{i+1} + b_{i+1} Z_{i+1} . \quad (19)$$

From  $N_{n-1} = b_{n-1} + c_n$  , one can write

$$N_{n-1} = b_{n-1} + \frac{Z_{n-1}}{N_n}$$

and

$$N_{n-1} = \frac{b_{n-1} N_n + Z_{n-1}}{N_n} .$$

Since  $N_n = 1$  ,

$$N_{n-1} = b_{n-1} N_n + Z_{n-1} ,$$

or

$$N_{n-2} = b_{n-2} N_{n-1} + Z_{n-2} ,$$

and, in general,

$$N_i = b_i N_{i+1} + Z_i . \tag{20}$$

Substituting Eqs. (19) and (20) into Eq. (15), it follows that

$$b_i + C_{i+1} = b_i + \frac{Z_i}{N_{i+1}} = \frac{b_i N_{i+1} + Z_i}{N_{i+1}} , \tag{21}$$

with Eq. (20), which gives the simple expression,

$$b_i + c_{i+1} = \frac{N_i}{N_{i+1}} . \quad (22)$$

Thus, the denominator product of Eq. (7), can be written as

$$c_1 \prod_{i=1}^{i=n-1} (b_i + c_{i+1}) = c_1 \frac{N_1}{N_2} \frac{N_2}{N_3} \frac{N_3}{N_4} \dots \frac{N_{n-2}}{N_{n-1}} \frac{N_{n-1}}{N_n} = c_1 \frac{N_1}{N_n} , \quad (23)$$

with  $N_n = 1$ , and from Eq. (16) one can write

$$c_1 = \frac{Z_o}{N_1}$$

and

$$Z_o = c_1 \frac{N_1}{N_n} .$$

But  $Z_o$  is, according to Eq. (19),

$$Z_o = a_1 N_1 + b_1 Z_1 . \quad (24)$$

Finally, one obtains

$$F(P) = \frac{\prod_{i=1}^{i=n} b_i}{a_1 N_1 + b_1 Z_1} . \quad (25)$$

According to Eqs. (19) and (20) the parameters,  $Z_1$  and  $N_1$ , for the first section of the transmission line are

$$Z_1 = a_2 N_2 + b_2 Z_2 , \quad (26)$$

and

$$N_1 = b_1 N_2 + Z_1 , \quad (27)$$

and, for the last, i. e.,  $n^{\text{th}}$ -section of the transmission line, with  $i = n-1$ ,

$$Z_{n-1} = a_n + b_n , \quad (28a)$$

and

$$N_{n-1} = b_{n-1} + a_n + b_n . \quad (28b)$$




The practical application of the method for a three-section line is indicated in Fig. 2; it is

$$Z_{n-1} = Z_2 = a_3 + b_3 ,$$

and

$$N_{n-1} = N_2 = b_2 + a_3 + b_3 ,$$

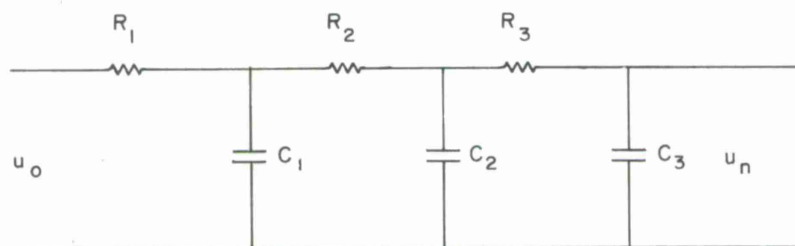

IA-14,794

and, according to Eqs. (19) and (20),

$$Z_1 = a_2 (b_2 + a_3 + b_3) + b_2 (a_3 + b_3) ,$$

and

$$N_1 = b_1 (b_2 + a_3 + b_3) + a_2 (b_2 + a_3 + b_3) + b_2 (a_3 + b_3) ,$$

and, finally,

$$F_{(P)} = \frac{b_1 b_2 b_3}{a_1 b_1 b_2 + a_1 b_1 a_3 + a_1 b_1 b_3 + a_1 a_2 b_2 + a_1 a_2 a_3 + a_1 a_2 b_3 + a_1 b_2 a_3 + a_1 b_2 b_3 + b_1 a_2 b_2 + \frac{b_1 a_2 a_3 + b_1 a_2 b_3 + b_1 b_2 a_3 + b_1 b_2 b_3}{}} \quad (29)$$

If the following substitutions are made

$$\begin{array}{lll} a_1 = R_1 & b_1 = \frac{1}{PC_1} & T_1 = R_1 C_1 \\ a_2 = R_2 & b_2 = \frac{1}{PC_2} & T_2 = R_2 C_2 \\ a_3 = R_3 & b_3 = \frac{1}{PC_3} & T_3 = R_3 C_3 \end{array}$$

Eq. (11) can be written in the form:

$$F(P) = \frac{1}{1 + P \underbrace{(T_1 + T_2 + T_3 + R_1 C_3 + R_1 C_2 + R_2 C_3)}_{k_1} + P^2 \underbrace{(T_1 T_2 + T_1 T_3 + T_2 T_3 + T_1 R_2 C_3 + T_3 R_1 C_2)}_{k_2} + \underbrace{P^3 (T_1 T_2 T_3)}_{k_3}} , \quad (30)$$

or

$$F(P) = \frac{1}{1 + k_1 P + k_2 P^2 + k_3 P^3} , \quad (31)$$

where the coefficients  $k$  to  $k_3$  are determined by the denominator of (30).

### SECTION III


#### ITERATED LUMPED DELAY LINES

An iterated delay line (see Fig. 3) may have a complex termination  $Z$ .  
Further, for simplicity, one can write:

$$\frac{a}{b} = A \quad (32a)$$

and

$$\frac{b}{z} = v \quad (32b)$$

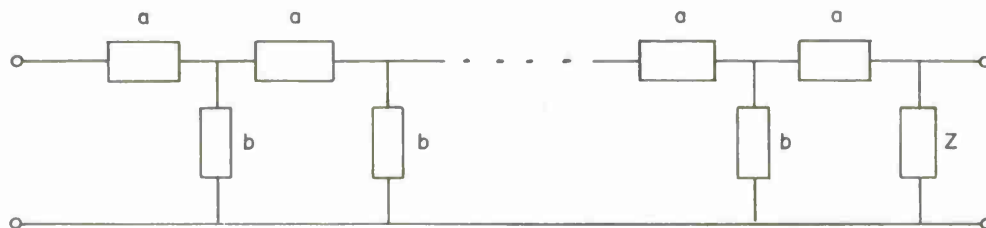

IA-14,795

Thus,

$$\frac{a}{z} = vA \quad . \quad (33)$$

If Eq. (25) is written in the form

$$D(P) = \frac{aN_1 + bZ_1}{b^n} \quad , \quad (34)$$

with

$$D(P) = \frac{1}{F(P)} \quad (35)$$

as differential operator, the coefficients for lines with  $n = 2, 3, 4$  can be written as indicated in Table I.

Table I

Coefficients for Lines with  $n = 2, 3, 4$

	n=2	n=3	n=4
$k_1$	$(2v+1)A$	$(3v+3)A$	$(4v+6)A$
$k_2$	$vA^2$	$(4v+1)A^2$	$(10v+5)A^2$
$k_3$		$vA^3$	$(6v+1)A^3$
$k_4$			$vA^4$

To make this clear, the coefficient  $k_2$  for  $n = 3$  is calculated:

$$\frac{a_1}{b_1} = \frac{a_2}{b_2} = \frac{a}{b} = A \quad (36a)$$

and

$$\frac{a_3}{b_3} = \frac{a}{b} = vA \quad (36b)$$

Thus, one finds the following expression for the coefficient  $k_2$  of the differential operator of Eq. (35):

$$k_2 = \frac{a_1}{b_1} \frac{a_2}{b_2} + \frac{a_1}{b_1} \frac{a_3}{b_3} + \frac{a_2}{b_2} \frac{a_3}{b_3} + \frac{a_1}{b_1} \frac{a_2}{b_3} + \frac{a_3}{b_3} \frac{a_1}{b_2} \quad (37a)$$

or

$$k_2 = A^2 + A^2v + A^2v + A^2v + A^2v \quad (37b)$$

$$k_2 = (4v+1) A^2 \quad (37c)$$

Continuing in this way, one can construct the Table of Coefficients. From the Table, it can be seen that the coefficient of the factor  $v$  in  $k_1$  can be

Table II  
Table of Coefficients

n		1	2	3	4	5	6	7
$k_1$	$v . 1$	2	3	4	5	6	7	
	$+ 0$	1	3	6	10	15	21	
$k_2$	$v . 0$	1	4	10	20	35	56	
	$+ 0$	0	1	5	15	35	70	
$k_3$	$v . 0$	0	1	6	21	56	126	
	$+ 0$	0	0	1	7	28	84	

expressed by the second coefficient  $\binom{n}{1}$  of the binomial expansion. Similarly, the second term in  $k_1$  can be expressed by the second factor  $\binom{n}{2}$  of the binomial theorem. Thus, one can write:

$$k_1 = \binom{n}{1} v + \binom{n}{2} . \quad (38)$$

The other  $k$ -coefficients can be found in an analogous manner, with

$$k_2 = \binom{n+1}{3} v + \binom{n+1}{4} , \quad (39)$$

and

$$k_3 = \binom{n+2}{5} v + \binom{n+2}{6} ,$$

or, in general, for any coefficient:

$$k_i = \binom{n+i-1}{2i-1} v + \binom{n+i-1}{2i} . \quad (40)$$

Finally, the coefficient next to the last one is

$$k_{n-1} = \binom{2n-2}{1} v + 1 . \quad (41)$$

Thus, the complete differential operator of an iterated delay line with  $n$ -sections can be written in the form

$$\begin{aligned} D_n(P) = & 1 + A(P) \left\{ \binom{n}{1} v + \binom{n}{2} \right\} \\ & + A^2(P) \left\{ \binom{n+1}{3} v + \binom{n+1}{4} \right\} \\ & + A^i(P) \left\{ \binom{n+i-1}{2i-1} v + \binom{n+i-1}{2i} \right\} \\ & + A^{n-1}(P) \left\{ \binom{2n-2}{1} v + 1 \right\} \\ & + A^n(P) v , \end{aligned} \quad (42)$$



and the phase shift in the form

$$\operatorname{tg} \phi = \frac{A(P) \left\{ \binom{n}{1} v + \binom{n}{2} \right\} \dots \pm A(P)^i \text{ (odd)} \left\{ \binom{n+i-1}{2i-1} v + \binom{n+i-1}{2i} \right\}}{1 - A^2(P) \left\{ \binom{n+1}{3} v + \binom{n+1}{4} \right\} \dots \pm A(P)^i \text{ (even)} \left\{ \binom{n+i-1}{2i-1} v + \binom{n+i-1}{2i} \right\}} . \quad (43)$$



## DOCUMENT CONTROL DATA - R&amp;D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

## 1. ORIGINATING ACTIVITY (Corporate author)

The MITRE Corporation  
Bedford, Massachusetts

## 2a. REPORT SECURITY CLASSIFICATION

Unclassified

## 2b. GROUP

## 3. REPORT TITLE

A Method to Compute the Characteristics of Lumped Electromagnetic Delay Lines  
(W-6324)

## 4. DESCRIPTIVE NOTES (Type of report and inclusive dates)

N. A.

## 5. AUTHOR(S) (Last name, first name, initial)

Opladen, Heinz B.

## 6. REPORT DATE

December 1965

## 7a. TOTAL NO. OF PAGES

21

## 7b. NO. OF REFS

0

## 8a. CONTRACT OR GRANT NO.

AF19(628)-2390

## b. PROJECT NO.

708

## c.

## d.

## 9a. ORIGINATOR'S REPORT NUMBER(S)

ESD-TDR-64-628

## 9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)

W-6324

## 10. AVAILABILITY/LIMITATION NOTICES

Qualified requesters may obtain from DDC. DDC release to OTS authorized.

## 11. SUPPLEMENTARY NOTES

## 12. SPONSORING MILITARY ACTIVITY

Directorate of Computers

Electronic Systems Division

L. G. Hanscom Field, Bedford, Mass.

## 13. ABSTRACT

This document presents a method of computing the coefficients of the transfer function of iterated or noniterated lumped electromagnetic delay lines. The method shows that the coefficients can be found by using Pascal's triangle for iterated delay lines.

## KEY WORDS

Delay Lines, Computation of Characteristics

Electromagnetic, Lumped, Characteristics

Frequency response Phase Shift

## LINK A

ROLE

WT

## LINK B

ROLE

WT

## LINK C

ROLE

WT

## INSTRUCTIONS

1. **ORIGINATING ACTIVITY:** Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. **REPORT SECURITY CLASSIFICATION:** Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. **GROUP:** Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. **REPORT TITLE:** Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. **DESCRIPTIVE NOTES:** If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. **AUTHOR(S):** Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. **REPORT DATE:** Enter the date of the report as day, month, year; or month, year. If more than one date appears on the report, use date of publication.

7a. **TOTAL NUMBER OF PAGES:** The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. **NUMBER OF REFERENCES:** Enter the total number of references cited in the report.

8a. **CONTRACT OR GRANT NUMBER:** If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. **PROJECT NUMBER:** Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. **ORIGINATOR'S REPORT NUMBER(S):** Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. **OTHER REPORT NUMBER(S):** If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. **AVAILABILITY/LIMITATION NOTICES:** Enter any limitations on further dissemination of the report, other than those

imposed by security classification, using standard statements such as:

- (1) "Qualified requesters may obtain copies of this report from DDC."
- (2) "Foreign announcement and dissemination of this report by DDC is not authorized."
- (3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."
- (4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."
- (5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. **SUPPLEMENTARY NOTES:** Use for additional explanatory notes.

12. **SPONSORING MILITARY ACTIVITY:** Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. **ABSTRACT:** Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. **KEY WORDS:** Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.



